



# uniarch

Powered by Uniview Tech.

۳۶ ماه گارانتی ردکا

1401.04.01

uniarch products, powered by uniview, guaranteed by redka



IPC-B112-PF28

### 2.0MP Fixed Bullet Network Camera

- ◆ Sensor: 1/2.9", 2.0 Megapixel, CMOS ◆ Lens: 2.8mm @F2.1
- ◆ IR Range: Up to 30m
- ◆ Ultra 265, H.265, H.264
- ◆ Frame Rate: Main Stream: 1080P (1920\*1080), Max 25fps; 720P (1280\*720)
- ◆ IR anti-reflection window to increase the infrared transmittance
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, Motion Detection, 2D/3D DNR, ONVIF
- ◆ Ingress Protection: IP67 / Plastic

17.800.000 IR/Rials



IPC-D112-PF28

### 2.0MP Fixed Dome Network Camera

- ◆ Sensor: 1/2.9", 2.0 MP, CMOS ◆ Lens: 2.8mm @F2.0
- ◆ IR Range: Up to 30m
- ◆ Ultra 265, H.265, H.264
- ◆ Frame Rate: Main Stream: 1080P, (1920\*1080), Max 25fps; 720P, (1280\*720), Max 25fps; Sub Stream: 4CIF (704\*576), Max 25fps
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, Motion Detection, 2D/3D DNR, ONVIF
- ◆ Ingress Protection: IP67 / Plastic, Vandal Resistant : IK10

15.000.000 IR/Rials



IPC-T122-PF28

### 2.0MP Fixed Turret Network Camera

- ◆ Lens 2.8 (106.7°), Shutter Auto/Manual 1~1/100000s, 2D/3D DNR, IR Range Up to 30m
- ◆ Digital Defog, DWDR
- ◆ HLC, BLC Supported, Privacy Mask Up to 4 areas, ROI Up to 8 areas, Support Ultra 265/H.265
- ◆ Power POE, IP67, Built in Mic

coming soon



IPC-B323-APF4

### 3.0MP Smart White Light Bullet Network Camera

- ◆ Sensor: 1/2.7", 3.0 Megapixel, CMOS ◆ Lens: 4.0mm @F1.6
- ◆ IR Range: Up to 50m
- ◆ Ultra 265, H.265, H.264
- ◆ Frame Rate: Main Stream: 3MP (2304\*1296), Max 25fps; 1080P (1920\*1080), Max 30fps
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, 2D/3D DNR, ONVIF
- ◆ Behavior Detection; Human Body Detection, Motion Detection, Audio Detection
- ◆ Build in MIC, Build in Speaker
- ◆ Ingress Protection: IP65 / Plastic

27.000.000 IR/Rials



IPC-B114-PF28

### 4.0MP Fixed Bullet Network Camera

- ◆ Sensor: 1/2.7", 4.0 Megapixel, CMOS ◆ Lens: 2.8mm @F2.1
- ◆ IR Range: Up to 30m
- ◆ Ultra 265, H.265, H.264, MJPEG
- ◆ Frame Rate: Main Stream: 4MP (2560\*1440), Max 20fps; 1080P (1920\*1080)
- ◆ IR anti-reflection window to increase the infrared transmittance
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, Motion Detection, 2D/3D DNR, ONVIF
- ◆ Ingress Protection: IP67 / Plastic

26.670.000 IR/Rials



IPC-D114-PF28

### 4.0MP Fixed Dome Network Camera

- ◆ Sensor: 1/2.7", 4.0 Megapixel, CMOS ◆ Lens: 2.8mm @F2.0
- ◆ IR Range: Up to 30m
- ◆ Ultra 265, H.265, H.264, MJPEG
- ◆ Main Stream: 4MP (2560\*1440), Max 20fps; 1080P (1920\*1080), Max 20fps; Sub Stream: 720P (1280\*720), Max 20fps
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, Motion Detection, 2D/3D DNR, ONVIF
- ◆ Ingress Protection: IP67 / Plastic
- ◆ Vandal Resistant : IK10

24.850.000 IR/Rials



IPC-T124-PF28

#### 4.0MP Fixed Turret Network Camera

- ◆ Optics: Lens 2.8 (97.0°), Shutter Auto/Manual 1~1/100000s, 2D/3D DNR, IR Range Up to 30m
- ◆ Digital Defog, DWDR
- ◆ Video: HLC, BLC Supported, Privacy Mask Up to 4 areas, ROI Up to 8 areas, Support Ultra 265/H.265
- ◆ Structure: Power POE, IP67, Built in Mic

coming soon



IPC-B314-APKZ

#### 4.0MP HD VF Bullet Network Camera

- ◆ Optics: Lens 2.8~12mm (102.79°), Motorized, Shutter Auto/Manual 1~1/100000s, 2D/3D DNR, IR Range Up to 50m
- ◆ Digital Defog, WDR120dB, Flip Normal/Vertical/Horizontal/190°
- ◆ Structure: Power POE, IP67, Built-in Mic
- ◆ Video: Privacy Mask Up to 4 areas, ROI Up to 8 areas, HLC, BLC Supported, Support Ultra 265/H.265

coming soon



IPC-B314-PKZ

#### 4.0MP VF IR Bullet Network Camera

- ◆ Sensor: 1/3", 4.0 megapixel, progressive scan, CMOS
- ◆ Lens: 2.8 ~ 12mm, motorized zoom lens
- ◆ IR Range: Up to 30m
- ◆ IR anti-reflection window to increase the infrared transmittance
- ◆ Ultra 265, H.265, H.264, MJPEGFrame Rate: Main Stream: 4MP (2592\*1520), Max 20fps, Sub Stream: 720P (1280\*720), Max 20fps, Third Stream: D1 (704\*576), Max 20fps
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, ANR, Motion Detection, API, ONV
- ◆ Edge Storage: Micro SD, up to 256GB
- ◆ Network Storage: ANR
- ◆ Ingress Protection: IP67 / Metal

56.500.000 IR/Rials



IPC-D314-PKZ

#### 4.0MP VF Vandal-resistant IR Dome Network Camera

- ◆ Sensor: 1/3", 4.0 megapixel, progressive scan, CMOS
- ◆ Lens: 2.8 ~ 12mm, motorized zoom lens
- ◆ IR Range: Up to 30m
- ◆ IR anti-reflection window to increase the infrared transmittance
- ◆ Ultra 265, H.265, H.264, MJPEGFrame Rate: Main Stream: 4MP (2592\*1520), Max 20fps, Sub Stream: 720P (1280\*720), Max 20fps, Third Stream: D1 (704\*576), Max 20fps
- ◆ Digital Defog, DWDR, HLC, BLC, OSD, Privacy Mask, ROI, ANR, Motion Detection, API, ONVIF
- ◆ Edge Storage: Micro SD, up to 256GB
- ◆ Network Storage: ANR
- ◆ Ingress Protection: IP67 / Metal
- ◆ Vandal Resistant : IK10

56.500.000 IR/Rials



Uho-S1

#### Smart Pan & Tilt Camera

- ◆ Easy to Instal and Use. ◆ Clear and Smooth Video Browsing; intelligent transmission giving full play to capabilities of the network. ◆ Online firmware upgrade and synchronous updating of the functions and experience. ◆ Remote real-time monitoring supported with Android and IOS smart phones. ◆ QR Code intelligent connection.
- ◆ Lens 3.6mm
- ◆ Angle of View 85°
- ◆ IR Range Up to 7m
- ◆ Two Way Audio Available (Built-in Mic and Speaker)
- ◆ Video Compression H.265, H.264 ◆ Image FHD:1920x1080@15fps
- ◆ Cloud Storage ◆ SD Card Up to 128GB
- ◆ Motion Detection, Motion Tracking, Intelligent Push, Pet Detection, Human Detection
- ◆ Alarm Linkage: Support Video Recording, Sound Alarm ◆ Alarm Notification: Push by Mobile App

coming soon



IPC-P4P4-X25

#### 4MP 25x Lighthunter Network PTZ Dome Camera

- ◆ Sensor 4.0 megapixel ◆ Lens type 4.8 ~ 120mm
- ◆ Shutter, 1 s ~ 1/100000 s
- ◆ WDR 120dB
- ◆ Digital Zoom 16 , Optical Zoom 25
- ◆ Smart IR Support ◆ IR Range Up to 100m
- ◆ Video Compression Ultra 265 U-code Support
- ◆ ROI Support
- ◆ Triple streams
- ◆ Privacy Mask 24 areas
- ◆ 2D/3D DNR
- ◆ Flip Normal/Flip Vertical/Flip Horizontal/180°/90°Clockwise/90°Anti-clockwise
- ◆ HLC ,BLC Supported
- ◆ Digital Defog
- ◆ Smart Intelligent: Line crossing detection, Intrusion detection, Region entrance detection, Region exit detection
- Face Capture Support
- ◆ People Counting Support
- ◆ Basic Detection Motion detection, Audio detection, Tampering Alarm
- ◆ Auto Tracking Support
- ◆ Two-way Audio Support
- ◆ Suppression Support
- ◆ Micro SD, up to 256 GB
- ◆ Network Storage ANR,NAS(NFS)
- ◆ Power PoE+, IP67 Vandal Resistant IK10
- ◆ Reset Button Support

coming soon




IPC-P1E5-AX4PKC

#### 5MP Lighthunter Active Deterrence Mini PTZ Camera

- ◆ Sensor 5.0 MP ◆ Lens 2.8~12mm
- ◆ shutter time: 1 s ~ 1/100000s
- ◆ 2D/3D DNR
- ◆ IR Range Up to 50m
- ◆ IR On/Off Control Auto/Manual
- ◆ Warm Light Range Up to 10m
- ◆ WDR 120dB Video Compression: Ultra 265
- ◆ Privacy Mask Up to 8 areas
- ◆ Motion Detection Up to 4 areas
- ◆ Smart IR Support Flip Normal/Vertical/Horizontal/180°-90°Clockwise/90°Anti-clockwise
- ◆ HLC ,BLC Supported
- ◆ Smart intrusion Prevention: Cross Line, Intrusion, Enter Area, Leave Area detection
- ◆ Tampering alarm, Audio Detection
- ◆ Two-way Audio Supported
- ◆ Suppression Supported
- ◆ Micro SD, up to 256 GB Network Storage ANR, NAS(NFS)
- ◆ Built-in Mic Built-in Speaker Alarm Light Supported
- ◆ Power PoE ,IP66
- ◆ Reset Button Supported

coming soon

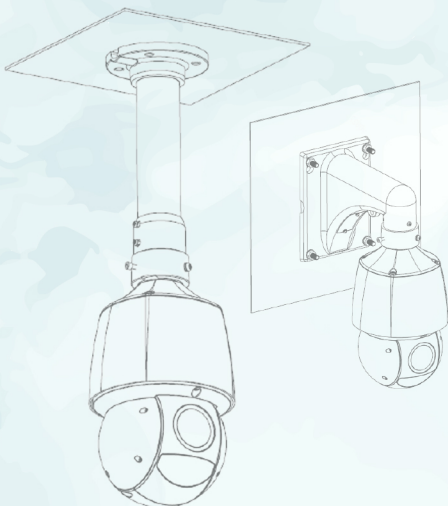



**NVR-104B**

#### 4-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 4-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 1080p/960p/720p/D1/2CIF/CIF
- ◆ Live view/Playback: 1080p/960p/720p/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 6TB
- ◆ VCA : Face detection, Intrusion detection, Cross line detection, Audio detection
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ USB Interface: 2x Front and Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 40Mbps

**26.700.000** IR/Rials



**NVR-108BC**

#### 10-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 10-ch; 8+2-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 1080p/960p/720p/D1/2CIF/CIF
- ◆ Live view/Playback: 1080p/960p/720p/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 6TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 40Mbps

**21.000.000** IR/Rials



**NVR-216S-P16**

#### 16-ch, 2 SATA HDDs Network Video Recorder

- ◆ IP Video Input: 16-ch ◆ POE Income: 16-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP / 6MP / 5MP / 4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- ◆ Live view/Playback: 8MP / 6MP / 5MP / 4MP / 3MP / 1080p/960p/720p/D1/2CIF/CIF
- ◆ Hard Disk: 2 SATA Interface, Up to 10TB for each disk
- ◆ ANR Technology to enhance the storage reliability when the network is disconnected
- ◆ Audio Output: 1-ch, RCA
- ◆ Alarm in: 4-ch , Alarm Out: 1-ch
- ◆ USB Interface: 2x Front and Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 160/96Mb

**105.000.000** IR/Rials



**NVR-110B2**

#### 10-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 10-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 5MP /4MP /3MP /1080P/960P/720P/960H/D1 /2CIF/CIF/QCIF
- ◆ Live view/Playback: 5MP / 4MP / 3MP /1080P/960P/720P/960H/D1 /2CIF/CIF/QCIF
- ◆ Hard Disk: 1 SATA Interface, Up to 6TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 40 Mbps

**27.200.000** IR/Rials



**NVR-116E**

#### 16-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 16-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP /6MP /5MP /4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- ◆ Live view/Playback: 8MP /6MP /5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 6TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Audio Output: 1-ch
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 64/32 Mbps

**42.300.000** IR/Rials



NVR-104E2

#### 4-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 4-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
- ◆ Live view/Playback: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
- ◆ Hard Disk: 1 SATA Interface, Up to 8TB
- ◆ VCA : Face detection,Intrusion detection, Crossline detection,Audio detection
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ USB Interface: 2x Front and Rear Panel
- ◆ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ◆ Incoming/Outcoming Bandwidth: 64/32Mbps

coming soon



NVR-110E2

#### 10-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 10-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
- ◆ Live view/Playback:8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF/QCIF
- ◆ Hard Disk: 1 SATA Interface, Up to 8TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ Audio Output: 1-ch, 3.5mm
- ◆ USB Interface: 2x Rear Panel
- ◆ Third-party IP cameras supported with ONVIF conformance: Profile S, Profile G, Profile T
- ◆ Incoming/Outcoming Bandwidth: 64/32Mbps

coming soon



NVR-116E2

#### 16-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 16-ch
- ◆ Decoding format: H.265 / H.264
- ◆ Recording Resolution: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- ◆ Live view/Playback: 8MP/6MP/5MP/4MP/3MP/1080p/960p/720p/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 8TB
- ◆ Audio Output: 1-ch, 3.5mm
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 64/32Mb

coming soon



NVR-104E2-P4

#### 4-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 4-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF
- ◆ Live view/Playback: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 8TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ POE: 4 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Support 1-ch HDMI, 1-ch VGA
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 40 Mbps

coming soon



NVR-108E2-P8

#### 8-ch, 1 SATA HDD Network Video Recorder

- ◆ IP Video Input: 8-ch
- ◆ Decoding format: Ultra 265 / H. 265 / H.264
- ◆ Recording Resolution: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF
- ◆ Live view/Playback: 8MP/5MP/4MP/3MP/1080P/960P/720P/960H/D1/2CIF/CIF
- ◆ Hard Disk: 1 SATA Interface, Up to 8TB
- ◆ Network Interface: 1 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ POE: 8 RJ45 10M/100M self-adaptive Ethernet Interface
- ◆ Audio Output: 1-ch
- ◆ USB Interface: 2x Rear Panel
- ◆ Incoming/Outcoming Bandwidth: 50/40 Mbps

coming soon